



WISWARE

# Sms Responser Pro

## User Manual

© 2010 Wisware Software Technologies Studio

Send comments about this document to: [support@wisware.com](mailto:support@wisware.com)

Copyright © 2010, Wisware Software Technologies Studio. All rights reserved.

This product or document is protected by copyright and distributed under licenses restricting its use, copying, distribution, and decompilation.

No part of this product or document may be reproduced in any form by any means without prior written authorization of Wisware Software Technologies Studio and its licensors, if any.

DOCUMENTATION IS PROVIDED "AS IS" AND ALL EXPRESS OR IMPLIED CONDITIONS, REPRESENTATIONS AND WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT, ARE DISCLAIMED, EXCEPT TO THE EXTENT THAT SUCH DISCLAIMERS ARE HELD TO BE LEGALLY INVALID.



Please Recycle

# Content

Introduction	1
Usage Guide	2
Support	6



Please Recycle


# Chapter 1

## Introduction

**Sms Responser Pro** can assist you when you are busy. The application automatically handles incoming call and sms on behalf of you. You just need to set a response sms and run the application. When a call or sms is coming, the application sends your pre-set message to the caller so they will know you are busy. Later you can browse all missed call and sms in the application.

You can set any response text you like. You can also set black/white number list, auto/manual hang up, etc.

Below is screenshot of **Sms Responser Pro**.

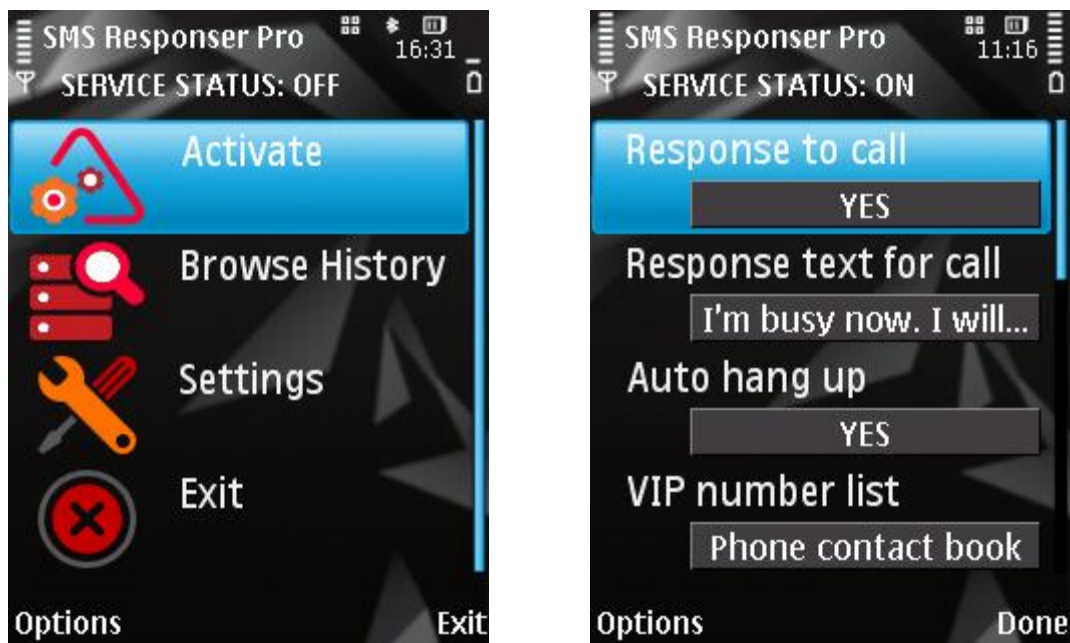

# Chapter 2

## Usage Guide



When you open **Sms Responder Pro**, you will see its console interface.

- To start sms response service, click **“Activate”**. After service is started, this item will change to **“Deactivate”**.
- Click **“Browse History”** to review recent 30 missed call and sms events.
- Click **“Settings”** to modify application settings.
- Click **“Exit”** to quit console interface. **Close console does NOT affect response service status.**



When you click **“Browse History”** in console, you will see a list of missed call and sms events as left picture.

Icon of each item indicates the event type: voice call or sms. Color of icon indicates if the application has sent response message for the event: green means message has been sent, red means not.

You can click each item to review more detailed information about corresponding event.

You can also make call or send sms to the caller with **Options** menu.





When you click “Settings” in console, you are able to change below application settings.

- **Show indicator icon** – Display a small icon at top of screen when service is on.
- **Indicator position** – Set position of indicator icon to avoid conflict to other icons.



- **Response to call** – Turn on this feature if you want the application to handle incoming call.

- **Response text for call** – Set the response text to incoming call. The response sms is sent when incoming call is hung up. The item is available only when “Response to call” is ON.

- **Auto hang up** – Turn on this feature if you want the application to hang up call automatically. Turn off this feature if you want to manually accept/reject incoming call. The item is available only when “Response to call” is ON.

- **VIP number list** – You can set a group of VIP phone numbers. Call from VIP numbers is not hung up even “Auto hang up” is turned on. This item is available only when “Response to call” and “Auto hang up” are ON. You have 3 options for VIP number list:

- **Phone contact book:** All numbers in your phone contact book are VIP numbers.

- **User define:** Define VIP numbers by

yourself. (Refer to

- **OFF:** No VIP



Define VIP list.)

number.





- **User define:** Define white numbers by yourself. (Refer to **Define white list**.)

- **OFF:** No white number.

- **Define white list** - If you have selected “*User define*” in **White number list**, you need to set white numbers here. You can put “,” as separator between phone numbers. You can use wildcard characters “\*” and “?”, where “\*” matches zero or more consecutive occurrences of any character and “?” matches a single occurrence of any character. (Refer to “**Define VIP list**”)

- **SMS encoding** – Set SMS phone to be compliable to operators support UCS-2. Some operators only support 7-Bit or 8-bit. You
  - **7-bit**
  - **8-bit**
  - **UCS-2**



encoding of your your operator. Most Some operators only have 3 options:

- **Auto activate** – The be set to activate with (instance: Meeting profile). It means the service starts/stops upon certain profile is started/stopped. You can also set "Always" which means service starts once phone is powered on.

response service can certain profile (for

- **Reminder note** – Enable this feature, response service can display a remind note on phone screen when you have missed incoming call.

- **One number one response** – Send only one response message to a certain number, even you have received many incoming call or sms from that number. This feature can prevent flood sms if someone keeps calling you or sending sms to you. Response counter is reset when you re-activate response service.

# Chapter 3

## Support

If you have any questions or suggestions for us, please contact us:

Web site: <http://www.wisware.com>  
Email: [support@wisware.com](mailto:support@wisware.com)

